Technical Manual

RS-3

ACOUSTIC & ELECTRICAL SPECIFICATIONS

- Nominal Impedance 8 ohms
- Max Amp Power 125 watts
- Frequency Response 40Hz – 20kHz
- Sensitivity 89 dB SPL, 1 watt @ 1 meter
- Crossover Frequency 2100Hz

SYSTEM COMPONENTS:

- Cabinet (Black) (Not for sale)
  (Cherry) (Not for sale)
- Grille (Upper) 333203-001
  (Lower) 331192-001
- Low Frequency Transducer 6 1/2" (160mm) Co-injected woofer, shielded 334041-001
  DC Resistance 3.4 ohms ±10%
- High Frequency Transducer 1" (25mm) Neodymium Soft Dome 333232-001
  DC Resistance 3.6 ohms ±10%
- Crossover Network 333229-001

SYSTEM COMPONENTS: (cont.)

AURAL SWEEP TEST SPECIFICATIONS:

- System Aural Sweep Test 6.0V Input 20 Hz to 20 kHz
- L.F. Aural Sweep Test 6.0V Input 20 Hz to 3 kHz
- H.F. Aural Sweep Test 2.0V Input 2 kHz to 20 kHz

PHYSICAL SPECIFICATIONS

- Enclosure dimensions: 15 1/2" x 7 1/2" x 11 1/4" (H x W x D) (393 x 190 x 286mm)

SHIPPING WEIGHT:

- 14.2 lbs. (6.5 kg) Sold in Pairs

WARRANTY:

- Refer to Warranty Statement packed with each product.

PACKAGING

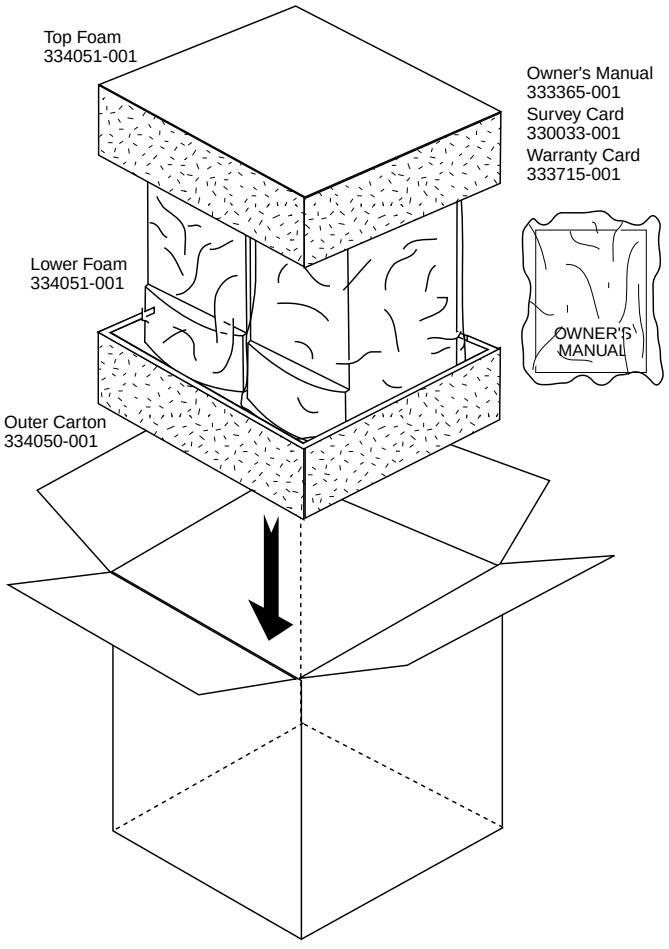

WIRING DIAGRAM

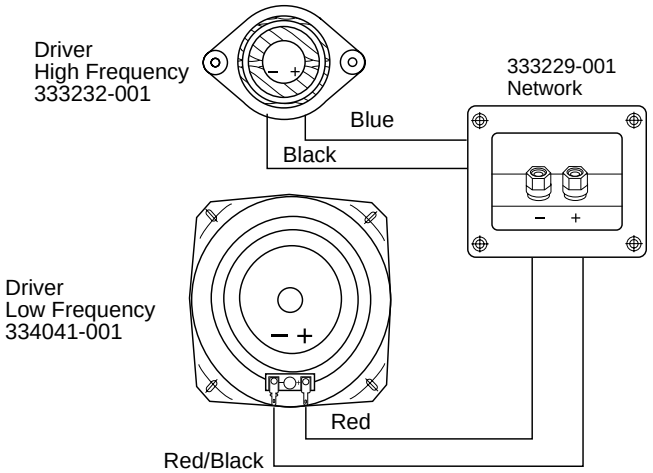

RS-3 SCHEMATIC

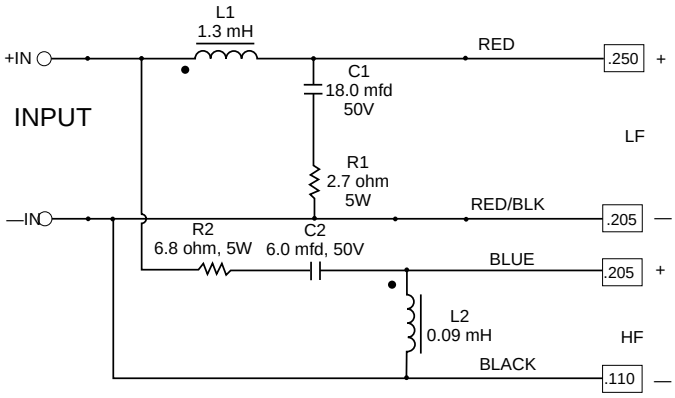

RS-3

RS-3

COMPONENT EXPLODED VIEW

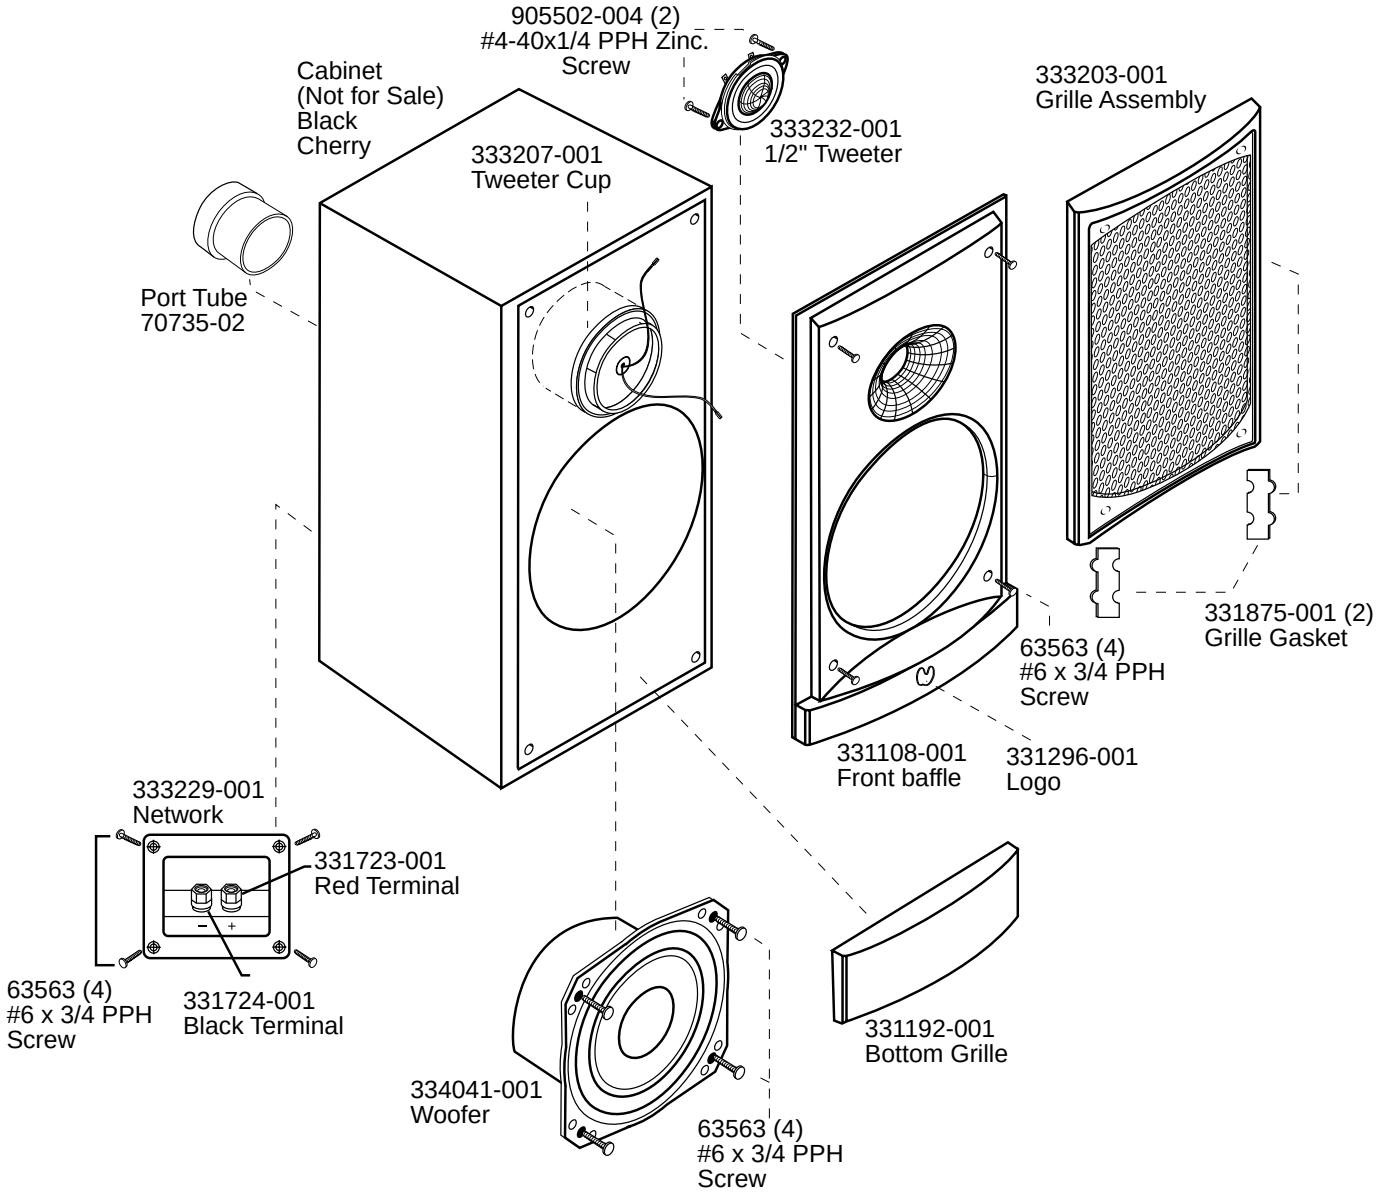

SERVICE NOTE:

For access to the drivers the front baffle must be removed (4 screws).